

CORBY

DIGITAL SAFE

www.corbyofwindsor.com

These notes must be read before use

These instructions are for your safety. Please read through them thoroughly before use and retain for future reference. Failure to follow them could cause injury and/or property damage.

CONTENTS**SECTION 01**

Important safety 03

SECTION 02

Introduction 04

SECTION 03

Setup 05
Installation 05
Use 06

IMPORTANT SAFETY

DO'S

- Read ALL the instructions before installing or using this safe.

- Only use this Safe for its intended use as described in this manual.

- Ensure the Safe is installed where there is sufficient load bearing capacity.

- Always install the Safe in accordance with this guide. If in doubt obtain expert advice.

DON'TS

- Do not use or store the Safe outdoors.

- Do not attempt to modify or make repairs to the Safe.

- Do not attempt to power this product by the introduction of a separate power supply other than that supplied.

BATTERY CAUTION

- Use of rechargeable batteries is not recommended for this product.
- Do not attempt to recharge non-rechargeable batteries.
- Only use batteries of the same or equivalent type to those recommended.
- Take special care to ensure the batteries are inserted correctly, observing polarity.
- Avoid short circuiting the contacts of the battery housing or the battery terminals.
- Remove exhausted batteries from product.
- Remove the battery from the product if storing for long periods.
- Remove the battery if the product is to be scrapped.
- Dispose of exhausted batteries safely and never dispose of batteries in a fire.

SAVE THESE INSTRUCTIONS

INTRODUCTION

Thank you for choosing this Corby Safe. The product has been designed to meet the most stringent quality, performance, and safety requirements. This Safe is perfectly suited to the requirements of a hotel guest-room.

HANDLING


Before continuing any further with the installation of this safe please read the following:

- When lifting always keep your back straight. Bend your legs and not your back.
- Avoid twisting at the waist. It is better to reposition your feet.
- Avoid upper body / top heavy bending. Always bend from the knees rather than the waist.
- Do not lean forward or sideways whilst handling the Safe.
- Always grip with the palm of the hand. Do not use the tips of fingers for support.
- Always keep the product as close to the body as possible to prevent unnecessary and undue strain on the body.
- Use gloves to provide additional grip.
- Always use assistance if required.


PARTS SUPPLIED

- 1x Safe
- 2x Fixing screws
- 4x AA batteries
- 1x Keys
- 1x Carpet

Front

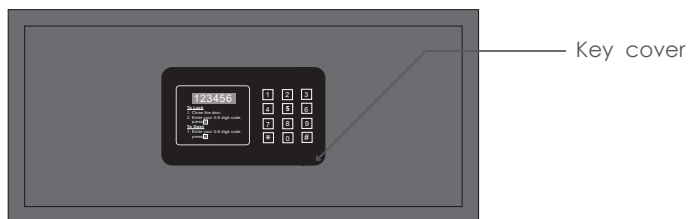

Internal

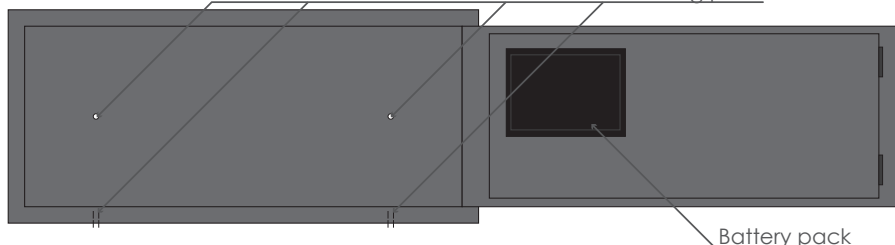


SETUP

- Install 4 x AA batteries into the battery pack.

INSTALLATION

Always bolt your Safe down

- (1) Choose a location for the Safe that is preferably concealed from view
- (2) Take care that there is sufficient floor load bearing capacity.
- (3) If installing the Safe in a cupboard or closet, make sure that its load bearing capacity is sufficient and that a secure anchorage point can be made through to the wall or floor.
- (4) Make sure that there is no plumbing or wiring below or behind the chosen location.
- (5) Use more than one fixing point to secure the safe.
- (6) When the Safe is to be anchored to a wood floor, ensure at least one of the anchorage points is into a joist/support beam rather than just the floorboards.

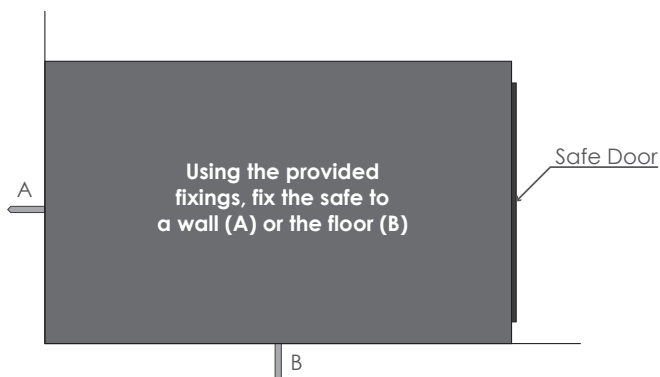

USE

Default codes

Guest code (3-6 digits): 123
 Manager code(6 digits): 000000

Confirm

Clear

GUEST CODE

To Lock

- (1) Close the door
- (2) Enter your 3-6 digit code, press

To Open

- (1) Enter your 3-6 digit code, press

USING MANAGER CODE

To Open

- (1) Press ('SUPER' will display)
- (2) Input default code (000000), press ('CC' will display)
- (3) Input 00, press

NOTE: If is pressed before inputting a code, '-' will display instead of the inputted code.

NOTE: If the wrong code is entered, the display will show 'ERROR'. If the wrong code is entered 3 times, the safe will shut down for 5 minutes.

CHANGING MANAGER CODE

When the safe is locked:

- (1) Press ('SUPER' will display)
- (2) Input original code, press ('CC' will display)
- (3) Input 01, press ('NEU' will display)
- (4) Input NEW 6 digit code, press ('REPEAT' will display)
- (5) Again, Input NEW 6 digit code, press ('GOOD' will display)

Manager code has been changed.

EMERGENCY OPEN/BATTERIES REQUIRE CHANGING:

- (1) Remove the key cover (shown on page 4) by pulling it towards you
- (2) Insert key and turn clockwise
- (3) Replace the key cover
- (4) Replace batteries if necessary

GUARANTEE

For your convenience, you are not required to complete a form and return it to us in order to validate your guarantee. However, please ensure that you retain your receipt which will act as both proof of purchase and a guarantee validation document. **We recommend that you attach your receipt to this documentation.**

Your product carries a 12 month guarantee from the date that the original purchaser receives it. If your product fails to operate to its specification due to faulty workmanship or materials during the guarantee period, we will either repair or replace the product. We will use our discretion to determine whether to offer a repair or provide a replacement. The product will not be covered by the guarantee if it has been misused, transformed, modified or altered in any way.

If your product fails within the guarantee period, please ensure that you have all necessary documentation available including proof of purchase (receipt or invoice with serial number, location and date of purchase) in addition to all original undamaged packaging and leaflets etc. It is strongly recommended that you inspect your product carefully before it is used or installed. For full details of your product you should refer to the instruction manual which accompanies the product. You are strongly advised to read this manual carefully in its entirety and to retain it for future reference.

This product guarantee does not affect your statutory rights.



www.firedupcorporation.com

Fired Up Corporation Ltd.
St Thomas Road
Huddersfield
HD1 3LF
United Kingdom
